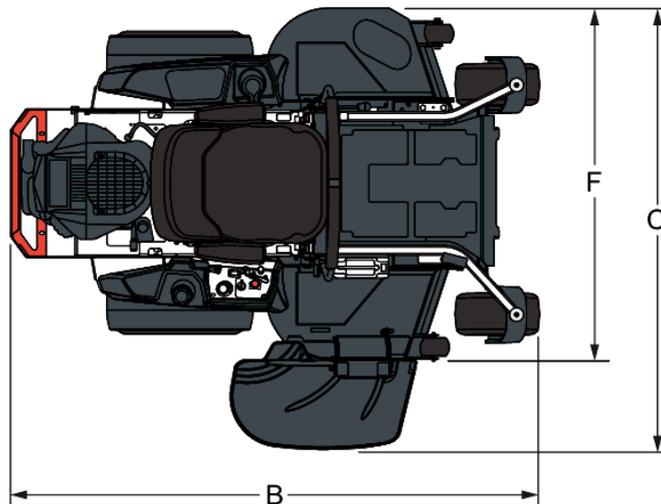
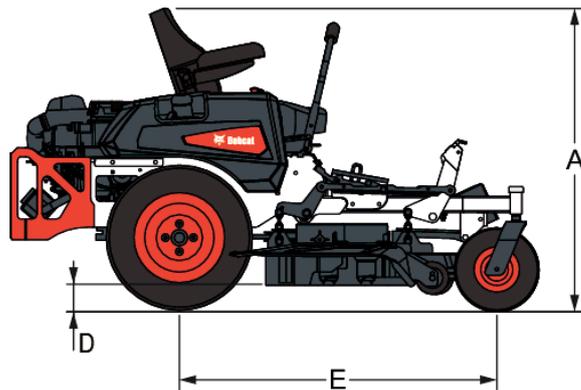


ZT3000 – 48”
Dimensions


(B) Overall Length	1930.0 mm
(C) Overall Width (Chute Up)	1241.0 mm
(C) Overall Width (Chute Down)	1575.0 mm
(D) Cutting Height	38 - 124 mm
(E) Wheelbase	1220.0 mm
(F) Cutting Width	1220.0 mm
(G) Blade Length	413.0 mm

ZT3000 – 48”**Engine**

Model	Kaw FR651V
Engine power	14.9 kW
Displacement	726 cm ³
Fuel Capacity	14.30 L
Air Filter	Dual Element

Electrical

Charging System	15 A
Clutch	556 N

Deck

Mower Deck	TufDeck Pro Cutting System
Width	1219.0 mm
Adjustable Anti-Scalp Rollers	3.0
Cutting Height	38.0-124.0 mm
Blade Tip Speed	14483 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	1930.0 mm
Machine Weight	343 kg

Transmission

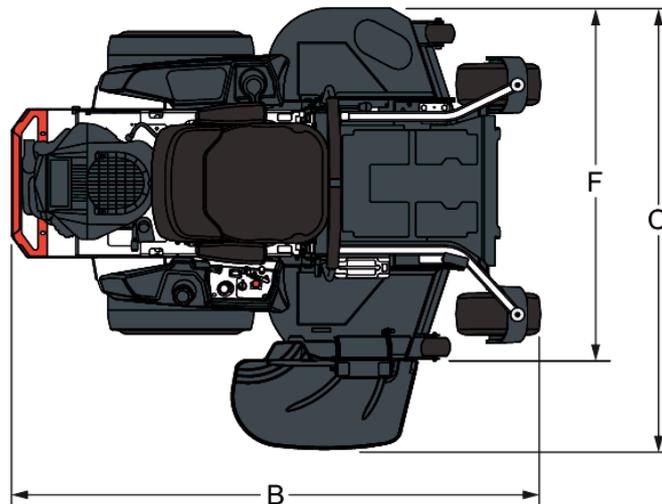
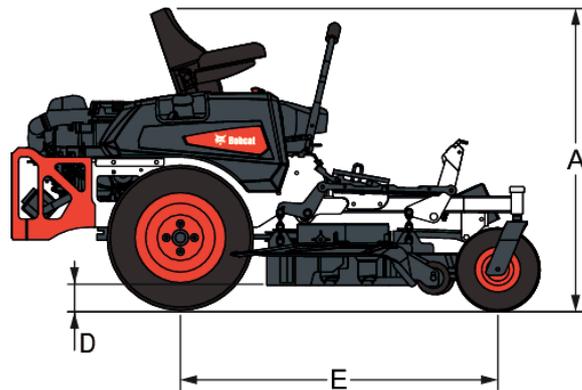
Type	HG ZT-3100 Hydrostatic Transaxles
Pump Displacement	10 cm ³
Oil Capacity	4.00 L
Forward Speed	12.8 km/h
Reverse Speed	5.6 km/h

Wheels

Drive Wheel Size	22 x 11-10
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Welded to Frame

Seat

Description	High-Back, EVC and Spring Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever

ZT3000 – 52"
Dimensions


(B) Overall Length	1930.0 mm
(C) Overall Width (Chute Up)	1241.0 mm
(C) Overall Width (Chute Down)	1734.0 mm
(D) Cutting Height	38 - 124
(E) Wheelbase	1220.0 mm
(F) Cutting Width	1321.0 mm
(G) Blade Length	457.0 mm

ZT3000 – 52”**Engine**

Model	Kaw FT730V
Engine power	17.8 kW
Displacement	726 cm ³
Fuel Capacity	14.30 L
Air Filter	Dual Element

Electrical

Charging System	15 A
Clutch	556 N

Deck

Mower Deck	TufDeck Pro Cutting System
Width	1320.0 mm
Adjustable Anti-Scalp Rollers	3.0
Cutting Height	38.0-124.0 mm
Blade Tip Speed	16043 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	1930.0 mm
Machine Weight	351 kg

Transmission

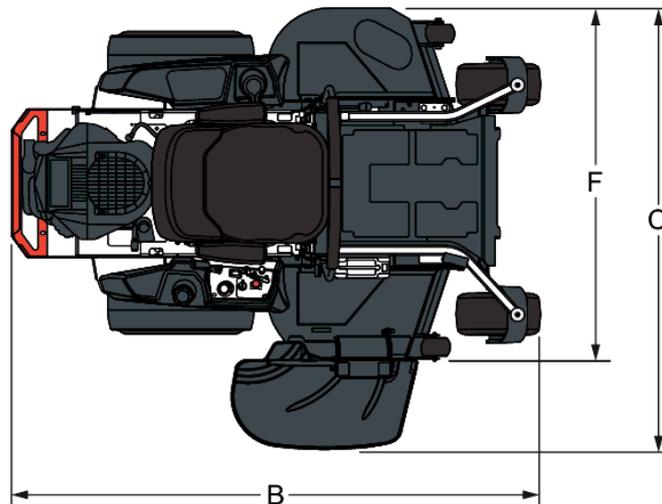
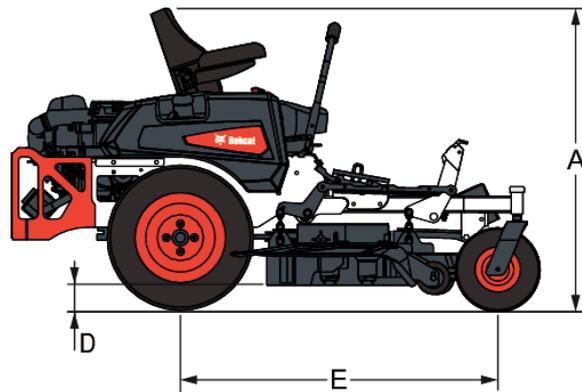
Type	HG ZT-3100 Hydrostatic Transaxles
Pump Displacement	10 cm ³
Oil Capacity	4.00 L
Forward Speed	12.8 km/h
Reverse Speed	5.6 km/h

Wheels

Drive Wheel Size	22 x 11-10
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Welded to Frame

Seat

Description	High-Back, EVC and Spring Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever

ZT3000 – 61”
Dimensions


(B) Overall Length	1930.0 mm
(C) Overall Width (Chute Up)	1600.0 mm
(C) Overall Width (Chute Down)	1949.0 mm
(D) Cutting Height	38 - 124 mm
(E) Wheelbase	1220.0 mm
(F) Cutting Width	1550.0 mm
(G) Blade Length	533.0 mm

ZT3000 – 61”**Engine**

Model	Kaw FT730V
Engine power	17.8 kW
Displacement	726 cm ³
Fuel Capacity	14.30 L
Air Filter	Dual Element

Electrical

Charging System	15 A
Clutch	556 N

Deck

Mower Deck	TufDeck Pro Cutting System
Width	1549.0 mm
Adjustable Anti-Scalp Rollers	7.0
Cutting Height	38.0-124.0 mm
Blade Tip Speed	16816 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	1930.0 mm
Machine Weight	370 kg

Transmission

Type	HG ZT-3100 Hydrostatic Transaxles
Pump Displacement	10 cm ³
Oil Capacity	4.00 L
Forward Speed	12.8 km/h
Reverse Speed	5.6 km/h

Wheels

Drive Wheel Size	22 x 11-10
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Welded to Frame

Seat

Description	High-Back, EVC and Spring Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever