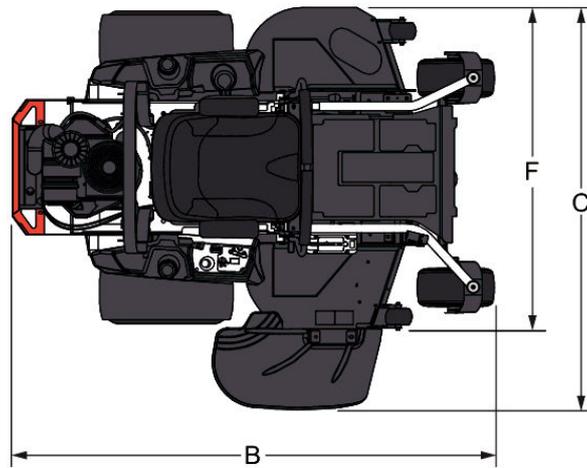
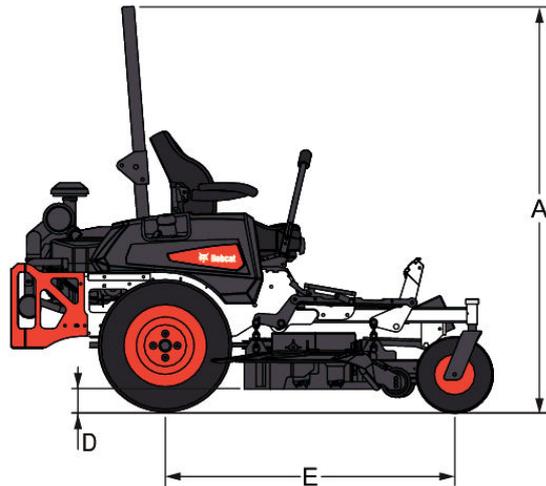


ZT3500 – 48"
Dimensions


(A) Height (ROP's Up)	1733.0 mm
(A) Height (ROP's Down)	1190.0 mm
(B) Overall Length	1930.0 mm
(C) Overall Width (Chute Up)	1241.0 mm
(C) Overall Width (Chute Down)	1575.0 mm
(D) Cutting Height	38 - 124 mm
(E) Wheelbase	1220.0 mm
(F) Cutting Width	1220.0 mm
(G) Blade Length	413.0 mm

ZT3500 – 48”**Engine**

Model	Kaw FT730V
Engine power	17.9 kW
Displacement	726 cm ³
Fuel Capacity	29.50 L
Air Filter	Dual-Stage Canister

Electrical

Charging System	15 A
Clutch	556 N

Deck

Mower Deck	TufDeck Pro Cutting System
Width	1219.0 mm
Adjustable Anti-Scalp Rollers	3.0
Cutting Height	38.0-124.0 mm
Blade Tip Speed	14483 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	1930.0 mm
Machine Weight	350 kg

Transmission

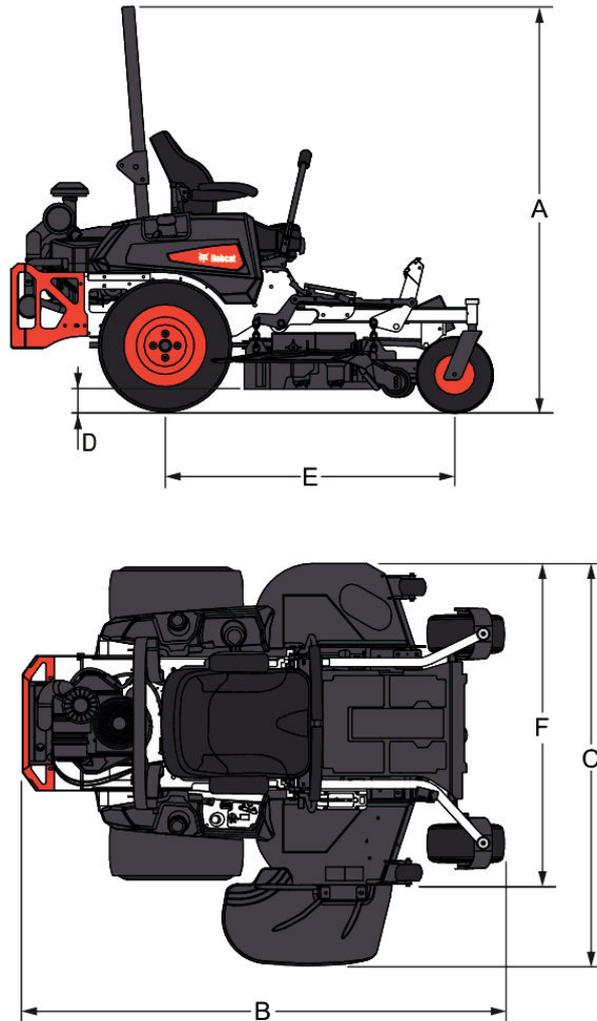
Type	HG ZT-3400 Hydrostatic Transaxles
Pump Displacement	12 cm ³
Oil Capacity	4.00 L
Forward Speed	16.0 km/h
Reverse Speed	5.6 km/h

Wheels

Drive Wheel Size	23 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Welded to Frame

Seat

Description	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever

ZT3500 – 52"
Dimensions


(A) Height (ROP's Up)	1733.0 mm
(A) Height (ROP's Down)	1190.0 mm
(B) Overall Length	1930.0 mm
(C) Overall Width (Chute Up)	1381.0 mm
(C) Overall Width (Chute Down)	1734.0 mm
(D) Cutting Height	38 - 124 mm
(E) Wheelbase	1220.0 mm
(F) Cutting Width	1321.0 mm
(G) Blade Length	457.0 mm

ZT3500 – 52”**Engine**

Model	Kaw FT730V
Engine power	17.9 kW
Displacement	726 cm ³
Fuel Capacity	29.50 L
Air Filter	Dual-Stage Canister

Electrical

Charging System	15 A
Clutch	556 N

Deck

Mower Deck	TufDeck Pro Cutting System
Width	1320.0 mm
Adjustable Anti-Scalp Rollers	3.0
Cutting Height	38.0-124.0 mm
Blade Tip Speed	16043 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	1930.0 mm
Machine Weight	357 kg

Transmission

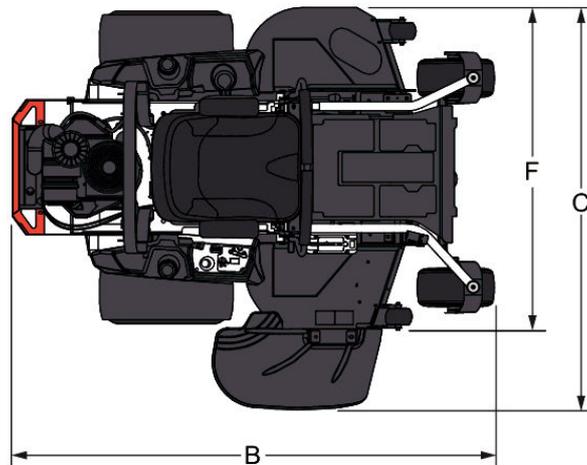
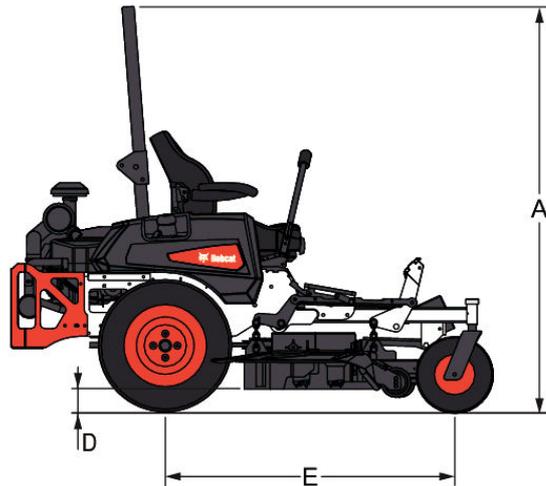
Type	HG ZT-3400 Hydrostatic Transaxles
Pump Displacement	12 cm ³
Oil Capacity	4.00 L
Forward Speed	16.0 km/h
Reverse Speed	5.6 km/h

Wheels

Drive Wheel Size	23 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Welded to Frame

Seat

Description	High-Back, EVC and Spring Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever

ZT3500 – 61”
Dimensions


(A) Height (ROP's Up)	1733.0 mm
(A) Height (ROP's Down)	1190.0 mm
(B) Overall Length	1930.0 mm
(C) Overall Width (Chute Up)	1600.0 mm
(C) Overall Width (Chute Down)	1949.0 mm
(D) Cutting Height	38 - 124 mm
(E) Wheelbase	1220.0 mm
(F) Cutting Width	1550.0 mm
(G) Blade Length	533.0 mm

ZT3500 – 61”**Engine**

Model	Kaw FT730V
Engine power	17.9 kW
Displacement	726 cm ³
Fuel Capacity	29.50 L
Air Filter	Dual-Stage Canister

Electrical

Charging System	15 A
Clutch	556 N

Deck

Mower Deck	TufDeck Pro Cutting System
Width	1549.0 mm
Adjustable Anti-Scalp Rollers	7.0
Cutting Height	38.0-124.0 mm
Blade Tip Speed	16816 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	2006.0 mm
Machine Weight	377 kg

Transmission

Type	HG ZT-3400 Hydrostatic Transaxles
Pump Displacement	12 cm ³
Oil Capacity	4.00 L
Forward Speed	16.0 km/h
Reverse Speed	5.6 km/h

Wheels

Drive Wheel Size	23 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Welded to Frame

Seat

Description	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever