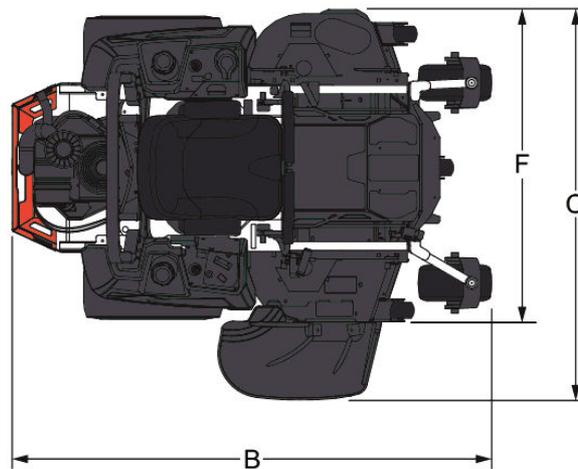
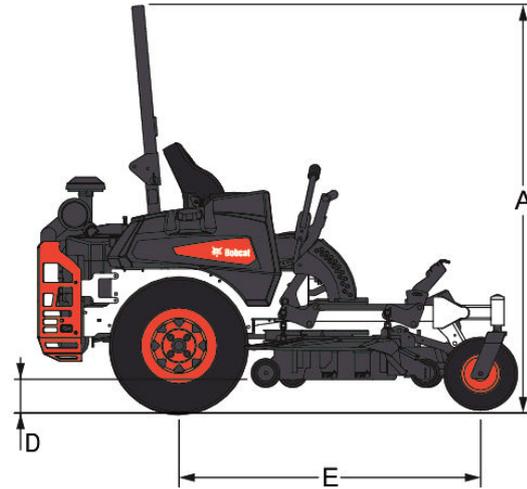


ZT6000 – 52"
Dimensions


(A) Height (ROP's Up)	1836.0 mm
(A) Height (ROP's Down)	1148.0 mm
(B) Overall Length	2108.0 mm
(C) Overall Width (Chute Up)	1381.0 mm
(C) Overall Width (Chute Down)	1731.0 mm
(D) Cutting Height	25 - 133 mm
(E) Wheelbase	3141.0 mm
(F) Cutting Width	1328.0 mm
(G) Blade Length	457.0 mm

ZT6000 – 52”**Engine**

Model	Kawasaki FX801V
Engine power	19.0 kW
Displacement	852 cm ³
Fuel Capacity	56.70 L
Air Filter	Canister Air Filter

Electrical

Charging System	15 A
Clutch	305 N

Deck

Mower Deck	AirFX Cutting System
Leading Edge	Adjustable, Front Lip Standard
Width	1320.0 mm
Adjustable Anti-Scalp Rollers	6.0
Cutting Height	25.0-133.0 mm
Blade Tip Speed	81.5 mps @ 3500 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	2108.0 mm
Machine Weight	585 kg

Transmission



Type	HG ZT-4400 Hydrostatic Transaxles
Pump Displacement	12 cm ³
Oil Capacity	6.90 L
Forward Speed	19.3 km/h
Reverse Speed	6.4 km/h

Wheels

Drive Wheel Size	24 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Bolt-On

Seat

Description	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever

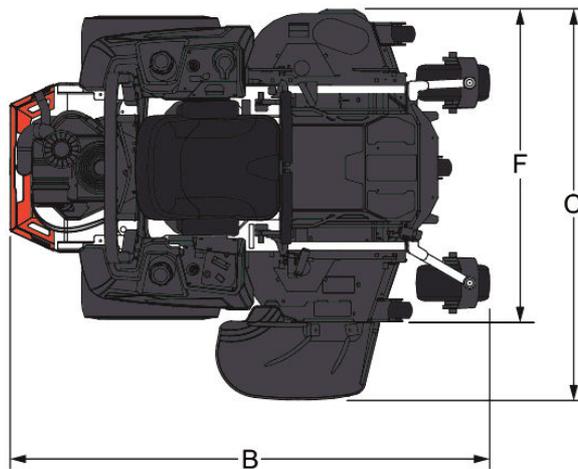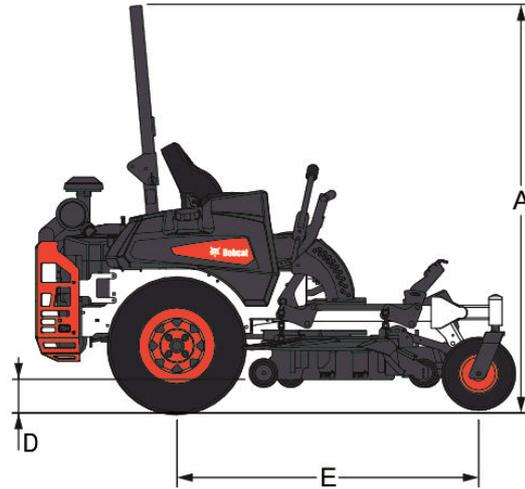ZT6000 – 61”
Dimensions


(A) Height (ROP's Up)	1781.0 mm
(A) Height (ROP's Down)	1148.0 mm
(B) Overall Length	2108.0 mm
(C) Overall Width (Chute Up)	1598.0 mm
(C) Overall Width (Chute Down)	1950.0 mm
(D) Cutting Height	25 - 133 mm
(E) Wheelbase	3141.0 mm
(F) Cutting Width	1550.0 mm
(G) Blade Length	533.0 mm

ZT6000 – 61”**Engine**

Model	Kaw FX801V
Engine power	19.0 kW
Displacement	852 cm ³
Fuel Capacity	56.70 L
Air Filter	Canister Air Filter

Electrical

Charging System	15 A
Clutch	305 N

Deck

Mower Deck	AirFX Cutting System
Leading Edge	Adjustable, Front Lip Standard
Width	1550.0 mm
Adjustable Anti-Scalp Rollers	6.0
Cutting Height	25.0-133.0 mm
Blade Tip Speed	85.4 mps @ 3500 Engine rpm
Discharge Chute	Flexible Molded Polymer

Frame

Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	2108.0 mm
Machine Weight	608 kg

Transmission

Type	HG ZT-4400 Hydrostatic Transaxles
Pump Displacement	12 cm ³
Oil Capacity	6.90 L
Forward Speed	19.3 km/h
Reverse Speed	6.4 km/h

Wheels

Drive Wheel Size	24 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Bolt-On

Seat

Description	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever